



# Ci-PF11/12/21/22

## Profibus DP Optical Fiber Repeater(protocol type)

ShenZhen Comark Technology Co., Ltd.

Tel: 86-755-26055466

Fax: 86-755-22630031

Post : 518126

Addr: Floor 4, Building G, No.2 Tangxi Industrial

Zone, No. 21, Xijing Road, Gu Shu, Xi Xiang, Bao'An

District, Shenzhen, 518126, P. R. China.

Website: <http://www.comark.cn>

### Summary

This series is designed for industrial grade Profibus-DP Optical Fiber Repeater, support Profibus-DP protocol, Support Dial switch for setting communication rate, Support 1~2 Profibus-DP bus, Support Redundancy optical fiber ring network, when fiber optic error somewhere, the system will rebuild the network link within 20ms, to guarantee the normal system communication, achieve the function of signal transmission self-healing protection, the system will recovery automatically after the network troubleshooting; this series products adopt Comark own R&D professional network protocol Ci-ring, no need any set, no need root knot, quickly finishing the network function of ring closing and ring opening, this series products can plug and play, no configuration, to simplify the user installation procedure at utmost. The product is Industrial grad designed, Casing: IP40 protection, wave grain aluminum reinforce case option, DIN rail mounting, DC(9~36v) power input, support optical fiber link failure and bus error alarm output, dual redundant power input and isolation protection. -40~75 °C Operating Temperature, can meet various Industrial situation.

### Characteristic

- Support 1~2 Profibus-DP bus, according to Profibus-DP Protocol
- Support 1~2 Fiber Optic Ports, ST connector ( SC, FC Optional)
- Support optical fiber link failure and bus error alarm output and LED indication
- Support Dial switch for setting communication rate
- Support Redundancy optical fiber ring network, solution cycle time < 20ms
- DC (9~36V) dual redundant power input, With DC1500V voltage isolation and reverse connect protection
- IP40 protection, Metal case (wave grain aluminum reinforce case option), 35mmDIN-Rail Installation
- Operating Temperature: -40°C to 75°C suitable to various Industrial work situation

### Ring Network

Profibus-DP bus Optical Fiber Repeater Networking topology can achieve the net link below: point to point communication, chain network, star network, redundancy dual networks and fiber optic ring network self-healing protection, etc. The product uses flexibly, can make up many kinds of fiber optic networks. Logically independent dual bus electric interface, can achieve electric interface backup or single equipment access dual redundancy bus system; adopt point to point network can achieve connecting two segments of Profibus-DP by fiber optic; adopt dual optical ports chain-shaped network fiber optic bus achieve multi-network-segments Profibus-DP connection (maximum 200 pcs); meanwhile, the product adopt dual optical ports to achieve the function of dual fiber ring network redundancy, when fiber optic error somewhere, the system will rebuild the network link within 20ms, to guarantee the normal system communication, achieve the function of signal transmission self-healing protection, the system will recovery automatically after the network troubleshooting; this series products adopt Comark own R&D professional network protocol Ci-ring, no need any set, no need root knot, quickly finishing the network function of ring closing and ring opening, this series products can plug and play, no configuration, to simplify the user installation procedure at utmost.

### Specification

#### Bus data interface

- Interface type: standard 9 pin type D Profibus-DP fieldbus cable interface, conform to Profibus DP protocol standard.
- Support Profibus DP bus standard
- Baud Rates: 9.6Kbps、19.2 Kbps、45.45Kbps、93.75Kbps、187.5Kbps、500Kbps、1.5Mbps、6Mbps、12Mbps
- Signal Delay (electrical interface): ≤11Bit
- constant voltage 1000V
- Resistor: without terminal resistor, connect external when necessary

#### Optical Interface

- Wave length: multi-mode 850nm、1310 nm; single mode 1310 nm、1550nm

- Fiber type: multi-mode 50/125um、62.5/125um、100/140um;single mode 8.3/125 um、9/125um、10/125um
- Transmission distance: multi-mode 2km, single mode 20km.
- Fiber interface type: ST/SC/FC (optional); ST (standard configuration).
- Single Fiber wavelength: A: Transmit wavelength is single mode 1310nm, then Receive wavelength is 1550nm; B: Transmit wavelength is single mode 1550nm, then Receive wavelength is 1310nm
- The optical line BER: <math> < 10^{-9}</math>
- Signal Delay (optical interface):  $\leq 2.3\mu\text{s}/\text{node}$

**Power**

- DC (9~36V) dual redundant power input, industrial standard voltage DC24V, consumption is less than 4W, With DC1500V voltage isolation and reverse connect protection, adopt 5 cores 5.08mm industrial terminal port (please use industrial standard power, otherwise it will occur unit error or damage).

**Protection**

- Relay: optical fiber link failure and bus error alarm output
- Contact rating: 1A @24V DC, Industrial Terminal port

**Mechanical**

- Dimensions (H×D×W): 136mm×104.8mm×52.8mm
- Weight:800g
- Casing: IP40 protection, wave grain aluminum reinforce case option
- Installation: Wall mounting or DIN rail mounting

**Environmental**

- Operating Temperature:-40 °C ~75 °C (-40 °C ~85 °C optional)
- Storage Temperature: -40°C~85°C
- Ambient Relative Humidity: 5%~95%(non-condensing)

**Warranty**


- Warranty Period: 5 years

**Certifications**

- IEC61000-4-2(ESD): Power  $\pm 2\text{KV}$  Contact,  $\pm 15\text{KV}$  Air; Relay  $\pm 2\text{KV}$  Contact,  $\pm 15\text{KV}$  Air; Data Cable  $\pm 15\text{KV}$  Air
- IEC61000-4-4(EFT):Power  $\pm 4\text{KV}$ , Data Cable  $\pm 4\text{KV}$

- IEC61000-4-5(Surge):Power  $\pm 2\text{KV}$  CM/  $\pm 1\text{KV}$  DM, Relay $\pm 2\text{KV}$  CM/  $\pm 1\text{KV}$  DM
- IEC60068-2-27(Shock)
- IEC60068-2-32(Free Fall)
- IEC61000-6-2(General Industrial Standard)
- EN50121-4 (rail transit)

**Overall Dimension**

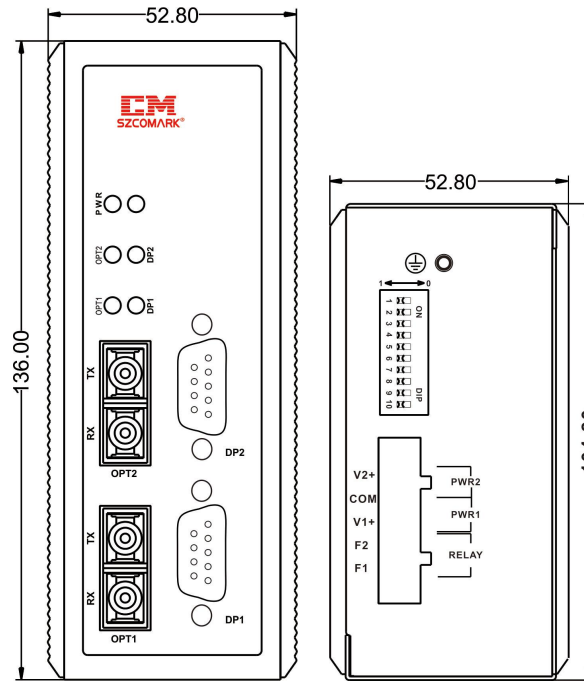

Front view

Top view

**LED Indicators**

LED	state	Description	Alarm
PWR	off	Non-connect or error	No
	Green light	Power is ok	No
	Red light	Power Error	No
OPT1-2	off	Non-connect or error	No

	Red light	The following conditions are called optical link failure: 1. No optical signal. 2. Optical port fault.	Yes
	Red shine	Optical failure, but has data sending	Yes
	Green light	Fiber link is normal	No
	Green shine	Fiber link is normal, have Signal	No
DP1-2	off	Fieldbus is closed	No
	Red light	The following conditions are called copper link failure: 1. No data received within 2 seconds on corresponding electric port. 2. Wrong setted.	Yes
	Red shine	Electric port fault but has data sending	Yes
	Green light	Copper port is normal	No
	Green shine	Copper port is normal, can received data	No

**Terminal Resistor**

Resistor is to eliminate the effect of the signal reflected in communication cable, in Actual configuration, the Terminal resistors of the two ends of line should be on the state of "ON", the ones of intermediate node should be on the state of "OFF", otherwise, it may make communication error. Suggest to use Profibus-DP standard connector and line.


**Connection**

1. Bus cable wiring methods: electrical interface is a 9-pin Sub-D socket connector; the connector has a lock for fixing. Pin definition conforms to Profibus-DP standard, using Profibus-DP dedicated fast connector plug for connecting to this interface here suggested, please don't connect the opened and unused cable to bus.


Profile	Subscript	Signal type	Definition
	1	Shield	Shield or protected area
	2	-	-
	3	RxD/TxD-P	Data line B
	4	-	-
	5	Ground	Data reference potential(ground)
	6	+5V Output	Supply voltage (+5V)
	7	-	-
	8	RxD/TxD-N	Data line A
	9	-	-

**2. Fiber connection methods:**


as shown in the figure below, the optical fiber must cross connection, namely the RX connect other side TX, and TX to RX accordingly. Ci-PF11 is one fiber port device, suitable for point-to-point connection; Ci-PF12 is dual fiber port device, suitable for bus network topology, one optical port (OPT1) to connect with front-end equipment, the other optical port (OPT2) with back-end equipment, optical fiber must cross connection.

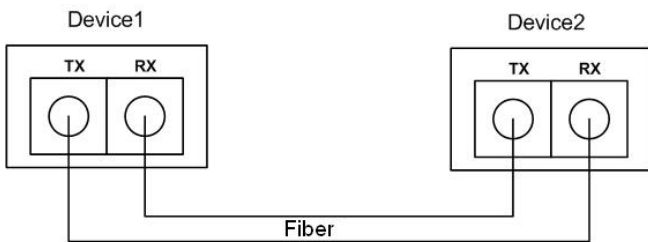

Single Fiber module(single fiber device), as shown in the figure below, single fiber can transmit and receive Signal,. Note, Single fiber use 2 different wavelength to transmit and receive signal, and its paired module transmit and receive wavelength is opposite.( Device1 transmit wavelength is 1310nm, receive one is 1550nm; device2 receive wavelength is 1310nm, transmit wavelength is 1550nm.)

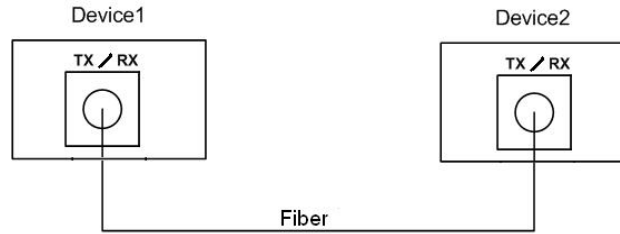

3. Power connection as shown in the figure below, this device supports dual redundant input, V1 +, V2 + respectively connect the anode of power supply (DC9 ~36V), COM with cathode (double power sharing).
4. Relay alarm output connection: F1, F2 in normal open. When the alarm is closed, make F1, F2 both contacted in series with external alarm circuit (e.g., buzzer, etc.).(When there is no electricity on device, the relay is closed.)

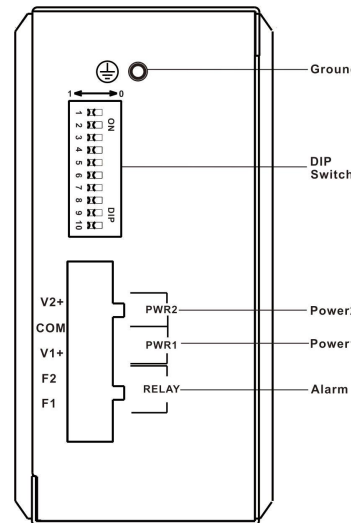


**DIN-Rail Installation**

In order to use in industrial environments expediently, Ci-PF11/12/21/22 adopt 35mm DIN-Rail installation, the installation steps as follows:


- Step 1: Examine the DIN-Rail attachment
- Step 2: Examine DIN Rail whether be firm and the position is suitability or not.
- Step 3: insert the bottom of the DIN-RAIL into the slot,

**More Reliable Connection, More Intelligent Life**


then insert the top of the DIN-RAIL into the slot. Step 4: after insert the DIN-RAIL into the slot, check the device is installed into the slot firmly.

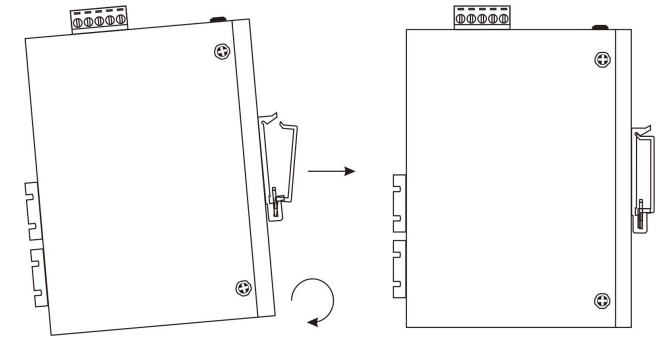


**Typical Application Point to Point**

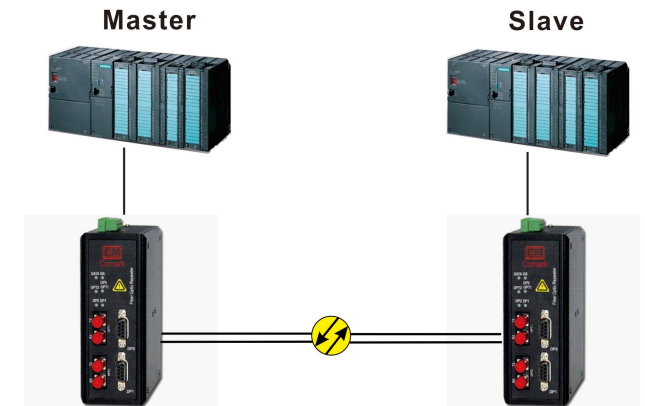


**Daisy Chain**

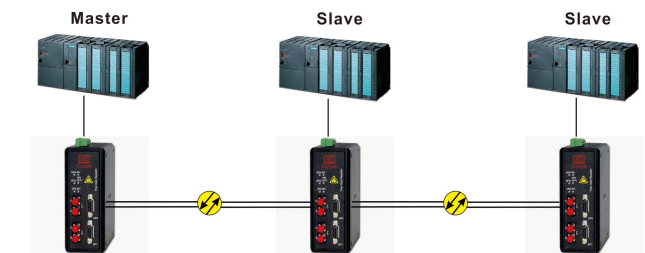

### Star Topology

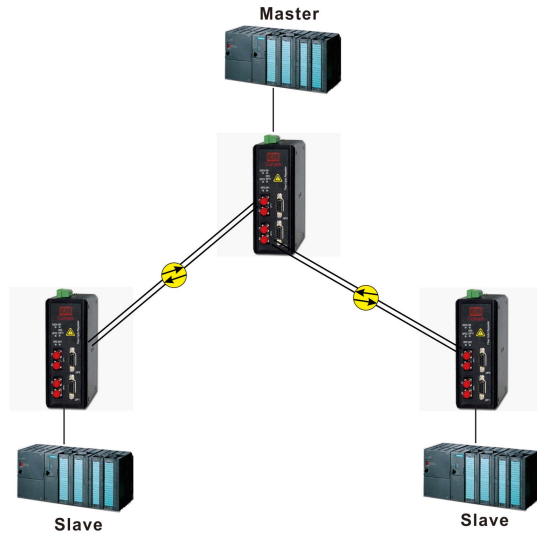

### Redundancy optical fiber ring network topology

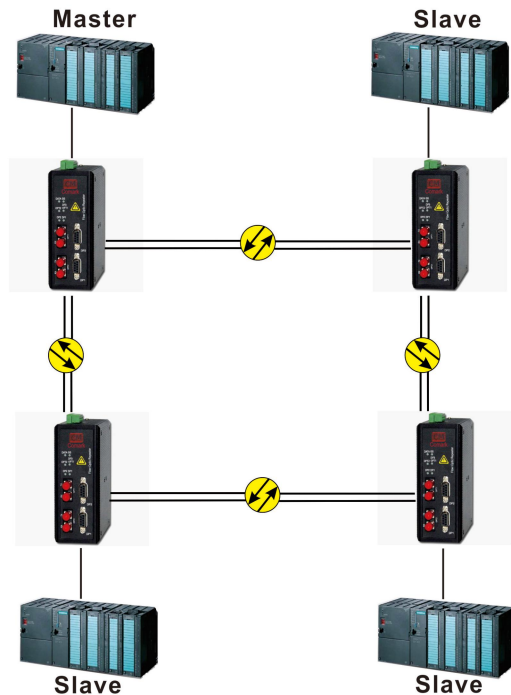

### Troubleshooting

Fault Symptoms	What to Do
PWR off	Check and ensure the power supply meets the requirement, and terminal wiring is correct or not.
PWR Red light	Device working error
OPT1~2 light	Check the fiber port connection, the length and type is correct or not.
OPT1~2 Red Shine	Check the Fiber port connection, whether the port can receive data.
DP1~2 Off	Profibus-DP communication abnormal, check the connector.
DP1~2 Red shine	Check received data conform to transmit data from bus or not.
LED Normal, can't communicate	Check the systems time delay spec meet the fieldbus standard, please note the unit time delay addition effect, please modify PLC parameter.

### Package Checklist

Please check accessories completely when open the box.

Packing list is as follows:

- Profibus-DP Optical Fiber Repeater (with industrial terminal block for power equipment)
- Product specification
- Product warranty card

### Cautions

- Please use DC24V Industrial standard power. Please use 0.75mm<sup>2</sup> above quality copper line.
- When relay alarm output, the voltage and current can exceed the rated one(1A@24VDC), otherwise, it will damage the unit.
- When the fiber port is not used, please use fiber cap to cover up to avoid pollute the fiber port.
- Please don't look the device fiber transmit port directly, avoid the light damage eyes.
- This device is precision communication instruction, please insure its ground connection well, the device ground connection is via the landing screw on the sideboard, please use the professional landing line, which is less than 2.5 mm<sup>2</sup>, and landing resistor is

less than 50hms.

### Order Information

Part No.	Product series	Description
Ci-PF11	1*copper,1*Fiber	1 channel standard Profibus DP port, 1 channel optical port, DIP switch set rate and rate adaptive optional, use for point to point topology, multi mode fiber 0~2Km, single mode fiber 0~20Km, longer distance optional, optical port type ST/SC/FC optional.
Ci-PF12	1*copper,2*Fiber	1 channel standard Profibus DP port, 2 channel optical ports, DIP switch set rate and rate adaptive optional, use for daisy chain, star, ring and other network topologies, multimode fiber 0~2Km, single mode fiber 0~20Km, longer distance transmission optional, optical port ST/SC/FC optional.
Ci-PF21	2*copper,1*Fiber	2 channels independent Profibus DP ports, 1 channel optical port, DIP switch set rate and rate adaptive optional, use for point to point topology, multi mode fiber 0~2Km, single mode fiber 0~20Km, longer distance transmission optional, optical interface type ST/SC/FC optional. <b>Note: use two electric meantime, the speed limited under 1.5Mbps.</b>
Ci-PF22	2*copper,2*Fiber	2 channels independent Profibus DP ports, 2 channel optical ports, DIP

	switch set rate and rate adaptive optional, use for daisy chain, star, ring and other network topologies, multi mode fiber 0~2Km, single mode fiber 0~20Km, longer distance transmission optional, optical ST/SC/FC optional. <b>Note: use two electric meantime, the speed limited under 1.5Mbps.</b>
--	---

S7...S10	=0000 set DP2 bus rate as 9.6Kbps =0001 set DP2 bus rate as 19.2Kbps =0010 set DP2 bus rate as 45.45Kbps =0011 set DP2 bus rate as 93.75Kbps =0100 set DP2 bus rate as 187.5Kbps =0101 set DP2 bus rate as 500Kbps =0110 set DP2 bus rate as 1.5Mbps =0111 set DP2 bus rate as 3Mbps =1000 set DP2 bus rate as 6M bps =1001 set DP2 bus rate as 12M bps =1111 set DP2 rate adaptive
----------	---

**Notes:** Electrical interface DP1 rate set by DIP switch SW [3...6], Electric interface DP2 rate set by DIP switch SW[7...10]. DP1, DP2 rate can be set to difference. Recommend to choose fixed rate. It has to set a fixed rate on slave station.

**Attached List** (Ci-PF series Baud rate switch set)

SW	Function
S1	=1(default) enable OPT1 Fiber port alarm output =0 disable OPT1 Fiber port error alarm output
S2	=1(default) enable OPT2 Fiber port alarm output =0 disable OPT2 Fiber port error alarm output
S3...S6	=0000 set DP1 bus rate as 9.6Kbps =0001 set DP1 bus rate as 19.2Kbps =0010 set DP1 bus rate as 45.45Kbps =0011 set DP1 bus rate as 93.75Kbps =0100 set DP1 bus rate as 187.5Kbps =0101 set DP1 bus rate as 500Kbps =0110 set DP1 bus rate as 1.5Mbps =0111 set DP1 bus rate as 3Mbps =1000 set DP1 bus rate as 6M bps =1001 set DP1 bus rate as 12M bps =1111 set DP1rate adaptive