

CK1000-4T1F

100M Unmanaged (DIN-Rail) Industrial Ethernet Switch



Features & Advantages

- Input Voltage: DC10-55V (AC/DC85-264V Optional)
- Operating Temperature: -40°C~+85°C
- Housing: IP40 protection, fan-free design
- Inspection Report: CE、FCC、RoHS
- Antistatic: 8KV-15KV
- MTBF: 100000 hours

Product Overview

The CK1000-4T1F series is a 100M Unmanaged (DIN-Rail) Industrial Ethernet Switch, supporting 1*100M Base-X optical interface+4*10/100M Base-T self-adaptive RJ45 ports. The products also adopt with fan-free, low power consumption design, IP40 protection, a corrugated high-strength metal shell, which can enhanced stability of working performance. The product adheres to CE, FCC, and RoHS standards. -40~85 °C operating temperature range enable to withstand harsh working environments. DIN-Rail installations, which can meet the requirements of various industrial settings, make it an ideal solution for quickly and reliably connecting users' Ethernet devices. The equipment can be widely used in various broadband data transmission fields, such as intelligent buildings, smart cities, smart communities, intelligent transportation, telecommunications, security, financial securities, customs, shipping, electricity, water conservancy, and oilfields.


Technical Specification

Business Interface	1*100M Base-X , 4*10/100M Base-T
Power Connector	3P Phoenix terminal, dual power supply redundancy
LED	Power indicator: PWR(green) ; Optical interface: FX(green); Network Port Indicator: yellow(100 or PoE), green(Link)

Cable Type & Distance	Twisted Pair 0-100m (CAT5e,CAT6) Single-Mode Fiber 20/40/60/80/100/120KM Multi-Mode Fiber 550m/2KM Optical Interface LC/SC/ST/FC
Network Topology & Scale	Point-to-Point Topology
Power Supply	Input Voltage DC10~55V (PoE/DC48~55V) Power Consumption Non-PoE full load(Total power)<4W, PoE full load<60W
PoE (Optional)	PoE Ports 4 PoE Protocols 802.3af 802.3at PoE Management unsupported
Switching Capacity	1.6G
MAC Address Table	1K
Packet Buffer	448K
Forward Delay	<10us
Port Feature	Crossover/Straight-Through self-adaption
Flow Control	Support
Packet Length	1536Kbytes
Storm Control	Support
Protection	IP40 IEC 61000-4-5 Level 3 (4KV/2KV) (8/20us) IEC 61000-4-5 Level 3 (6KV/2KV) (10/700us) IEC 61000-4-3 Level 3 (10V/m) IEC 61000-4-4 Level 3 (1V/2V) IEC 61000-4-6 Level 3 (10V/m) IEC 61000-4-8 Level4 (30A/m) IEC 61000-4-11 Level3 (10V) EMI CLASS A IEC 61000-4-2 Level 4 (15KV/30KV) 0.5m
Operating Temperature	-40°C~+85°C
Storage/Transportation Temperature	-40°C~+85°C
Relative Humidity	5%~95%(non-condensing)
Packet Length	Fan-free Design for Natural Heat Dissipation
MTBF	100,000 hours
Size	130X94X35mm
Installation	DIN-Rail
Weight	0.5KG

Dimension

Unit: mm

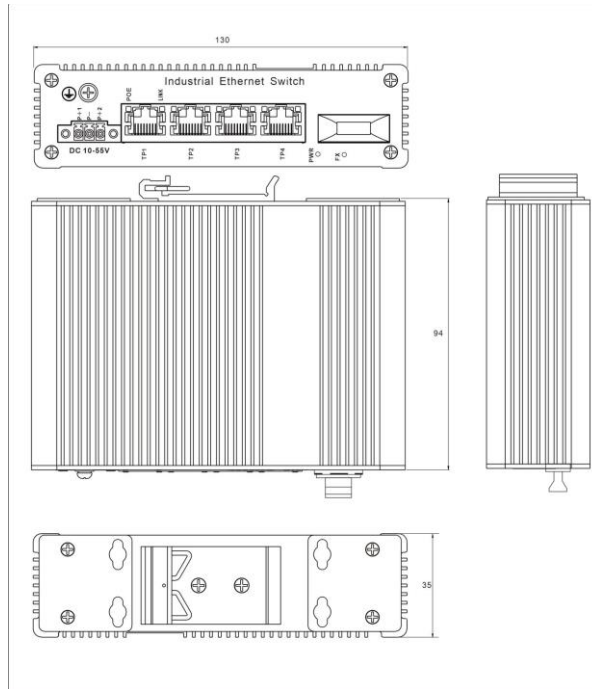

Product Models

Product Models	Specifications & Descriptions
CK1000-4T1F	1*100M Base-X optical interface (default SC interface, ST/FC optional, Single-mode/Multi mode optional) +4*10/100M Base-T self-adaptive RJ45 ports. DIN-Rail installation. -40°C~+85°C